




## Feature

- 2U standard 19-inch industrial chassis, black aluminium oxide wire drawing panel, the handle of humanization, adopt polishing technology, show high-grade temperament.
- 3 lines of microphone input, 4 lines auxiliary input and 1 line of auxiliary output.
- Built-in Mp3 player, support USB and SD card access.
- With forced switching and priority function, convenient for prior broadcast inserting
- With short current/load checking protection function automatic.
- 4 partitions for linkage and adjusting volume for each partition.
- 8 partition can be adjusted by linking 2 piece the voltage, and 12 partition can be adjusted by linking 3 piece the voltage, etc.
- Quality CD audio output. Output 100V、70V、4-16 OHM, amplifier outputs options for 150W、250W、350W、450W、550W、650W.

## Specifications

Model	OBT-6154	OBT-6254	OBT-6354	OBT-6454	OBT-6554	OBT-6654
<b>Rated Power</b>	150W	250W	350W	450W	550W	650W
<b>Speaker Outputs</b>	70V, 100V & 4~16Ω					
<b>Input Sensitivity &amp; Impedance</b>	MIC 1, 2, 3: 5mV/600Ω, Unbalanced 6.35 Screw Input AUX 1, 2, 3, 4: 350mV/10KΩ, Unbalanced RCA Screw Input					
<b>Output Sensitivity &amp; Impedance</b>	MIX OUT: 1000mV/470Ω, Unbalanced RCA Screw Output					
<b>Overload source electromotive force</b>	MIC 1, 2, 3: >12dB, Unbalanced 6.35 Screw Input AUX 1, 2, 3, 4: >20dB, Unbalanced RCA Screw Input MP3: >20dB, Unbalanced Input					
<b>Tone</b>	Bass: ±10dB at 100Hz Treble: ±10dB at 10KHz					
<b>Frequency Response</b>	50Hz~16KHz(+1dB, -3dB)					
<b>S/N Ratio</b>	MIC 1, 2, 3: 66dB; AUX 1, 2, 3, 4: 80dB					
<b>THD</b>	1KHz 0.5%, 1/3 Output Power Consumption					
<b>Muting Function</b>	MIC 1 overrides other input signals 0-30 dB adjustable					
<b>Crosstalk</b>	≤50dB					
<b>Cooling</b>	Forced air from front to rear, start built-in fan when radiator temperature reaches 45 degrees					
<b>Protection</b>	Over heat, over load & short circuit					
<b>Power Supply</b>	AC 220V/50Hz					
<b>Power Consumption</b>	260W	450W	700W	950W	1200W	1600W
<b>Weight</b>	12.1KG	14.47KG	17.32KG	18.3KG	20.4KG	21.2KG
<b>Dimensions</b>	484×450×88mm					

Parts

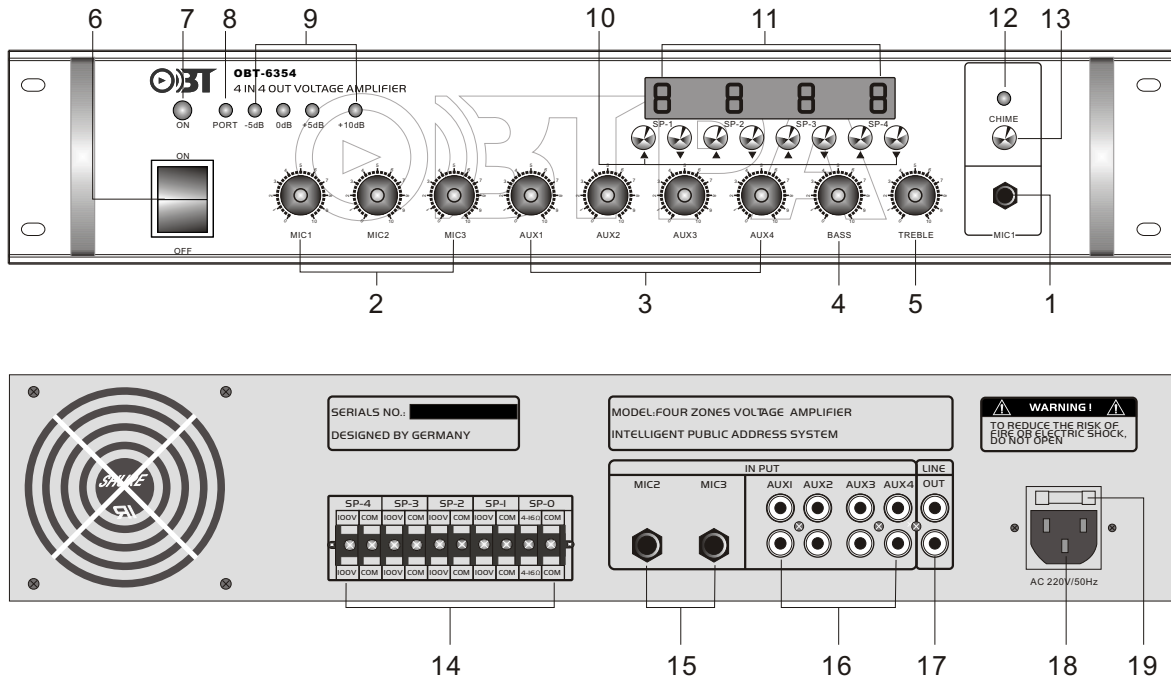

- |                 |                               |                  |
|-----------------|-------------------------------|------------------|
| ① Mic 1 Input   | ⑧ Protection signal indicator | ⑮ MIC2,3 Input   |
| ② Mic Volume    | ⑨ Input Audio Level Indicator | ⑯ AUX input      |
| ③ Aux Volume    | ⑩ Zone output volume control  | ⑰ Line out       |
| ④ Bass Volume   | ⑪ Zone volume display         | ⑱ AC Power input |
| ⑤ Treble Volume | ⑫ Chime indicator             | ⑲ Embedded fuse  |
| ⑥ Power On/off  | ⑬ Chime button                |                  |
| ⑦ Power LED     | ⑭ Zone output interface       |                  |

Link

