


TIGER

ELECTROMECHANICAL operator for gates with one or two swings up to 3,5 mt \ 4,5 per swing.

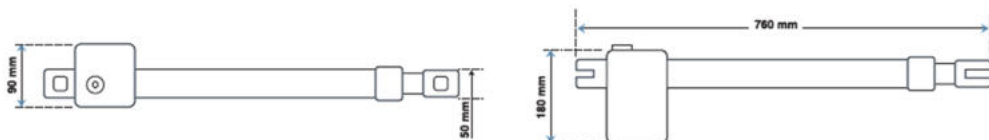

TECHNICAL SPECIFICATIONS

	TIGER 400 230 V	TIGER 400 24V	TIGER 550 230V	TIGER 550 24V
Power Supply	230V - 50/60 HZ	230V - 50/60 HZ	230V - 50/60 HZ	230V - 50/60 HZ
Motor power supply	230 VCC	24 VdC	24 VdC	24 VdC
Absorbed power	350W	60 W	350 W	60 W
Absorbed current	1,5A	3,0 A	1,5 A	3,0 A
Stroke	400mm	400mm	600mm	600mm
Operating temperature	-20°C / +55°C	-20°C / +55°C	-20°C / +55°C	-20°C / +55°C
Max leaf lenght	3,5 MT	3,5 MT	4,5 MT	4,5 MT
Max leaf weight	250 kg	250 kg	300 kg	250 kg
Max Thrust	300 N	300 N	350 N	300 N
Lubrification	Permanent grease	Permanent grease	Permanent grease	Permanent grease
Usage	Intensive	Intensive	Intensive	Intensive
Operator weight	6,0 Kg	6,0 Kg	7,0 Kg	7,0 Kg

AVAILABLE ACCESSORIES



12/24V SAFETY
PHOTOCELLS



2CH REMOTE
CONTROL



4CH REMOTE
CONTROL



FLASHING
LIGHT



KEY SWITCH